

# Advancements in nanohybrids: From coordination materials to flexible solar cells

Shahab Khan<sup>1,2,\*</sup>, Inam Ullah<sup>1</sup>, Salman Khan<sup>1</sup>, Sanila Ajmal<sup>3</sup>, Najmus Saqib<sup>1</sup>, Faizan Ur Rahman<sup>1</sup>, Shahid Ali<sup>2</sup>

<sup>1</sup> Department of Chemistry, GGUDC Samarbag, Dir Lower, University of Malakand, Chakdara, Malakand 18800, Pakistan

<sup>2</sup> School of Chemistry and Material Science, Shanxi Normal University, Xi'an 710119, China

<sup>3</sup> Department of Chemistry, University of Agriculture Faisalabad, Faisalabad 38000, Punjab, Pakistan

\* Corresponding author: Shahab Khan, shahabkhan262@gmail.com

## CITATION

Khan S, Ullah I, Khan S, et al. (2024). Advancements in nanohybrids: From coordination materials to flexible solar cells. *Journal of Polymer Science and Engineering*, 7(1): 4276. <https://doi.org/10.24294/jpse.v7i1.4276>

## ARTICLE INFO

Received: 17 January 2024

Accepted: 22 February 2024

Available online: 28 March 2024

## COPYRIGHT



Copyright © 2024 by author(s).

*Journal of Polymer Science and Engineering* is published by EnPress Publisher, LLC. This work is licensed under the Creative Commons Attribution (CC BY) license.

<https://creativecommons.org/licenses/by/4.0/>

**Abstract:** This comprehensive review explores the forefront of nanohybrid materials, focusing on the integration of coordination materials in various applications, with a spotlight on their role in the development of flexible solar cells. coordination material-based nanohybrids, characterized by their unique properties and multifunctionality, have garnered significant attention in fields ranging from catalysis and sensing to drug delivery and energy storage. the discussion investigates the synthesis methods, properties, and potential applications of these nanohybrids, underscoring their versatility in materials science. Additionally, the review investigates the integration of coordination nanohybrids in perovskite solar cells (PSCs), showcasing their ability to enhance the performance and stability of next-generation photovoltaic devices. the narrative further expands to encompass the synthesis of luminescent nanohybrids for bioimaging purposes and the development of layered two-dimensional (2D) material-based nanostructured hybrids for energy storage and conversion. the exploration culminates in an examination of the synthesis of conductive polymer nanostructures, elucidating their potential in drug delivery systems. lastly, the article discusses the cutting-edge realm of flexible solar cells, emphasizing their adaptability and lightweight design. Through a systematic examination of these diverse nanohybrid materials, this review sheds light on the current state of the art, challenges, and prospects, providing valuable insights for researchers and practitioners in the fields of materials science, nanotechnology, and renewable energy.

**Keywords:** coordination materials; nanohybrids; advanced energy storage; solar cells

## 1. Introduction


Coordination materials-based nanohybrids represent a fascinating frontier in materials science, where the synergy between organic ligands and metal ions creates versatile structures with multifunctional properties. These nanohybrids, often designed at the molecular level, leverage the unique coordination chemistry of metal ions to impart specific functionalities to the resulting materials. One of the distinctive features of coordination materials is their ability to form well-defined structures through coordination bonds, leading to the assembly of organized and tailored architectures. In the realm of nanohybrids, coordination materials find application in a myriad of fields, ranging from catalysis and sensing to drug delivery and energy storage [1]. The controlled synthesis of these hybrids allows for the precise incorporation of organic ligands and metal ions, enabling the fine-tuning of their properties for targeted applications. For instance, the incorporation of luminescent metal complexes into coordination nanohybrids has paved the way for advanced imaging and sensing

technologies, capitalizing on the inherent properties of the metal ions to emit light under specific conditions. Moreover, coordination materials-based nanohybrids exhibit remarkable catalytic activities owing to the inherent reactivity of metal centers. The well-defined coordination environments provide an ideal platform for catalytic reactions, and these hybrids have been employed as efficient catalysts in various chemical transformations. The modular nature of coordination materials allows for the incorporation of different metal ions and ligands, enabling the development of catalytic nanohybrids with tailored reactivity and selectivity. In the realm of drug delivery, coordination materials-based nanohybrids offer a unique combination of biocompatibility and controlled release properties. The metal-ligand coordination bonds can be designed to respond to specific stimuli, such as pH or temperature, triggering the release of encapsulated therapeutic agents at targeted sites. This precise control over drug release enhances therapeutic efficacy while minimizing side effects. Furthermore, the advent of coordination materials-based nanohybrids has made significant strides in the development of advanced energy storage and conversion systems. Metal-organic frameworks (MOFs), a subclass of coordination materials, have emerged as promising candidates for applications in batteries and supercapacitors due to their high surface areas and tunable porosities [2].

The unique properties of these nanohybrids position them as model support structures for developing nanomaterials with extraordinary performance features [3]. The design of luminescent nanohybrids for bioimaging purposes has been explored through various approaches in the literature. Silica luminescent nanohybrids containing  $\text{Eu}^{3+}$ -complexes were synthesized using three distinct methods to determine the most efficient approach for obtaining highly emissive final hybrids suitable for cell imaging applications, leveraging the luminescent probe properties of  $\text{Eu}^{3+}$ . The synthesis process involved the transformation of dense Stober silica nanoparticles ( $\text{SiO}_2$ ) into luminescent hybrids through a series of well-defined steps. The surface of  $\text{SiO}_2$  was first functionalized with APTES, and the amine group subsequently reacted with salicylaldehyde to form a Schiff base ligand (SB), resulting in the  $\text{SiO}_2$ -SB system. The coordination of  $\text{Eu}^{3+}$  ions to SB, followed by the displacement of coordinated water molecules with Dibenzoylmethane (DBM), led to the creation of the hybrid  $\text{SiO}_2$ -[Eu]. Tris-[Eu(DBM)<sub>3</sub>] complexes coordinated to the imine groups grafted on the  $\text{SiO}_2$ -SB surface were employed to generate the  $\text{SiO}_2$ -[Eu] hybrid. A novel  $\text{Eu}^{3+}$ -Schiff base combination with a triethoxysilyl group was grafted onto the  $\text{SiO}_2$  surface to produce the third hybrid,  $\text{SiO}_2$ -[Eu].

All three luminescent hybrids exhibited red emission, extended lifetimes (0.34–0.61 ms), and remarkable photostability under continuous 340 nm UV light exposure. Characterized by a spheroidal form and a size of 100 nm, the hybrids were evaluated using the LUMPAC software program and the Horrocks equation to determine quantum efficiency (QE) and the quantity of coordinated water molecules ( $\text{qH}_2\text{O}$ ) to the  $\text{Eu}^{3+}$ . While all three synthesis methods showed promise,  $\text{SiO}_2$ -[Eu] emerged as the optimal hybrid based on photophysical results, boasting higher QE and color purity values. Moreover,  $\text{SiO}_2$ -[Eu] demonstrated non-toxicity (**Figure 1**), as evidenced by its bio-viability in CHO-k1 cells at various dosages. The effectiveness of  $\text{SiO}_2$ -[Eu] as a luminous stain for cell imaging was further validated through exploratory cell imaging assays, where the internalization of nanoparticles within the cells was

confirmed by  $\text{Eu}^{3+}$  ( ${}^5\text{D}_0$   ${}^7\text{F}_1$ ) narrow emission bands, showing distinct cell marking in proximity to the nucleus. In conclusion,  $\text{SiO}_2$ -[Eu] exhibited favorable characteristics in terms of form, size, optical properties, and biocompatibility, positioning it as a promising candidate for use as a luminous stain in cell imaging applications [4].

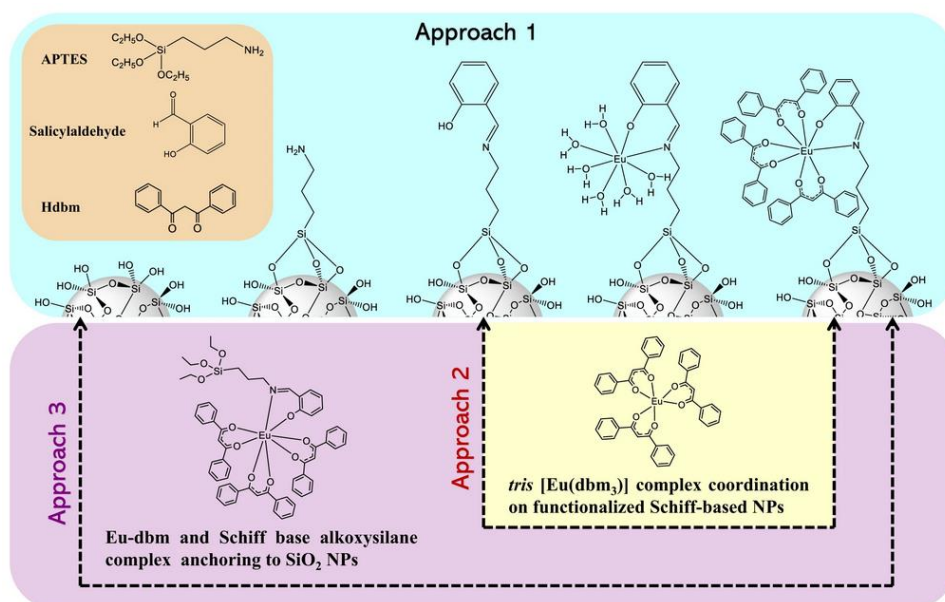

**Figure 1.** Three approaches for Silica luminescent nanohybrids containing  $\text{Eu}^{3+}$ -complexes  $\text{SiO}_2$  [Eu] in CHO-k1 cells [4].

## 2. Synthesis of CPs nanostructures

The synthesis of conductive polymers (CPs) nanostructures involves crafting nanoscale architectures with enhanced electrical conductivity and distinctive properties, combining the electrical characteristics of metals with the mechanical features of polymers. The synthesis process encompasses several key steps. Firstly, an appropriate monomer, such as aniline, pyrrole, or thiophene, is selected based on the desired properties of the final nanostructure. Various polymerization methods, including chemical oxidation, electrochemical polymerization, and oxidative polymerization, offer tailored approaches to CPs nanostructure production. Chemical oxidation, utilizing agents like ammonium persulfate, is apt for bulk synthesis, while electrochemical methods, involving an electrode for precise control, offer advantages in size and morphology modulation. Oxidative polymerization, with agents like ferric chloride or bromine, allows for specific shape and size control. Template-assisted synthesis, utilizing porous materials or nanostructures, and surfactant-assisted synthesis, employing stabilizing surfactants, contribute to dimension and shape regulation. Doping, a crucial step employing acids, salts, or electron-accepting molecules, enhances electrical conductivity. Thorough characterization using techniques such as Scanning Electron Microscopy (SEM), Transmission Electron Microscopy (TEM), X-ray Diffraction (XRD), and Fourier Transform Infrared Spectroscopy (FTIR) evaluates size, morphology, crystallinity, and chemical structure. Finally, exploring applications in sensors, flexible electronics, energy storage devices, and emerging technologies leverages the unique electrical and mechanical properties of CPs nanostructures. Through meticulous control of synthesis

parameters, researchers can tailor CPs nanostructure properties for specific applications, contributing to advancements in materials science and electronic devices. The structure and morphology of the CPs sensing layers, which are the result of structural effects, are intimately connected to the sensing responses. To meet the needs of various types of sensor setups, a variety of procedures have been investigated to construct 0D, 1D, 2D, and 3D CPs nanostructures. Thus, the process used to create the CPs nanostructures is crucial for the integration of sensors [5]. Research interest has been growing in the “MXene” family of massive, recently discovered 2D materials. The substance has good optoelectronic, physicochemical, thermoelectrical, and mechanical capabilities [6], and is made up of transition metal carbides and nitrides. The formula  $M_n + 1X_nTx$ , where  $n = 1, 2$ , or  $3$ , may be used to show MXene. M stands for a transition metal (such as Mn, Sc, Cr, Nb, Ta, Mo, and Hf), X for a C or N element, and T for various surface functional groups or atoms (–OH, O, or F). The predecessors of MXene are MAX phases, which have the common formula  $M_n + 1AX_n$ , where A is any element from groups IIIA and/or IVA of the periodic table. X indicates a C and/or N element, and  $n = 1, 2, 3, 4$ , and  $5$  [6].

### 3. Properties of coordination material-based nanohybrids

The properties of coordination material-based nanohybrids underscore their significance in the realm of materials science. These nanohybrids exhibit a remarkable interplay between organic ligands and metal ions, giving rise to a diverse range of functionalities [7]. Their unique coordination chemistry enables the formation of well-defined structures, allowing for precise control over their size, shape, and composition. Coordination material-based nanohybrids often boast enhanced mechanical, thermal, and electrical properties, making them versatile candidates for various applications. The tunability of these properties is further augmented by the choice of metal ions and ligands during the synthesis process. Additionally, coordination nanohybrids frequently exhibit superior catalytic activities, making them valuable in catalysis and sensing applications. Their inherent biocompatibility and tailored release mechanisms also position them as promising candidates for drug delivery systems. As the exploration of these nanohybrids advances, their properties continue to be fine-tuned, paving the way for innovations in fields such as energy storage, biomedical applications, and catalysis [8].

## 4. Emerging solar cell technologies

### 4.1. Lead-based perovskite materials

Lead-based perovskite materials have emerged as a transformative force in the field of photovoltaics and optoelectronics. These materials, typically adopting the  $ABX_3$  crystal structure, where A is a cation, B is a metal cation, and X is an anion, exhibit exceptional optical and electronic properties. Particularly, lead halide perovskites, such as methylammonium lead iodide ( $MAPbI_3$ ), have demonstrated outstanding power conversion efficiencies in solar cells, rivaling traditional silicon-based technologies. The facile and cost-effective fabrication processes, including solution-based deposition techniques, make lead-based perovskites attractive for large-scale production. However, their commercial viability is tempered by concerns

regarding the toxicity of lead, urging researchers to explore alternative compositions, such as tin-based perovskites. Ongoing research endeavors focus on enhancing the stability, scalability, and environmental impact of lead-based perovskite materials, aiming to unlock their full potential for clean energy applications. Despite challenges, the rapid progress and immense promise of lead-based perovskite materials continue to drive innovation and reshape the landscape of renewable energy technologies. Kojima et al. employed MAPbI<sub>3</sub> and MAPbBr<sub>3</sub> as the first perovskite materials to be used in DSSCs as a sensitizer and Pb-halide-based perovskites have since drastically changed the field of PVs [9]. The photovoltage and photocurrent of the device are significantly altered by the employment of I and Br ions as a halide anion in the PSCs. Pb-based perovskites have a number of exceptional qualities that make them suited for optoelectronic uses. They are semiconductors with an almost perfect direct band-gap (1.6 eV) and for single-junction solar cells, the Shockley-Queisser gap is 1.43 eV. They have an extremely high absorption coefficient ( $\alpha = 5 \times 10^4 \text{ cm}^{-1}$ ), which is nearly 25 times more than Si's and even better than GaAs [10]. Because e<sup>-</sup> and h<sup>+</sup> have balanced, very tiny effective masses to enhanced conveyance using charge carriers [11]. With a 1 μm diffusion length, photo-generated charge carriers have a long lifespan. Planar and lateral structures are the two forms of architecture that may be employed in the creation of perovskite single crystal devices. A planar or conventional sandwiched structure is an example of the solar cell architecture that is most often used. Malinkiewicz et al. [12] created a planar structured single crystal device; in this work, the team combined fullerene derivatives with MAPbI<sub>3</sub> as a donor material. Their planar devices were made utilizing a thermally deposited 285 nm MAPbI<sub>3</sub> thin film at ambient temperature. sandwiched between materials that act as an electron acceptor (PCBM) and an electron blocker (polyTPD) is a film. The manufactured device established a benchmark PCE of 12% for an organic solar cell based on fullerene [13], and since then, additional small molecule-based hybrid solar cells have reached PCEs of 18% [12,14]. In contrast to the typical arrangement of a planar structured device, lateral structured single crystal devices exhibit improved thermal and mechanical characteristics, providing the device with more stability.


#### 4.2. Dye-sensitized solar cells (DSSCs)

The dye-sensitized solar cell (DSSC) provides a practical and effective technology for the delivery of energy in the future. It offers comparable power conversion efficiency (PCE) to traditional silicon solar cells at cheap manufacturing and material costs. titanium oxide (TiO<sub>2</sub>) is a common, affordable, and environmentally safe DSSC material. In order to print DSSCs on the mass production line, a roll-to-roll method might be used since DSSC materials are less prone to contamination and processable at room temperature. DSSCs are a great option for interior applications since they work better in lower light intensities. The development of molecular engineering has led to the introduction of colorful and transparent thin films to increase the aesthetic qualities. Such advantages have so far sparked a lot of research interest and commercialization activity. This study considers device modeling, cutting-edge methodologies, and unique device topologies to explore advanced approaches and research trends of this promising technology [15]. As a result, the dye sensitized solar cells (DSSC) (**Figure 2a**) [16], a novel form of solar

cell consisting of a counter electrode, an electrolyte containing iodide-triiodide ions, and a nanocrystalline porous semiconductor electrode that absorbed dye [17], have been thoroughly researched. Based on photosensitization caused by the dyes on the wide band-gap mesoporous metal oxide semiconductors [18], it is a device for converting visible light into electricity. Due to the dye's absorption of a portion of the visible light spectrum, this sensitization has occurred. Sensitized dye functions by receiving solar energy and transforming it into electrical energy. **Figure 3b** illustrates the DSSC's basic operating concept. It falls under the following categories of flows: 1) an electron went through an excitation cycle; 2)  $\text{TiO}_2$  was injected into, and iodine was reduced at the counter electrode; 3) an electron performed external work [19]; 4) the electrolyte was diffused; and 5) the oxidized dye was restored. Due to its potential uses in environmental protection and energy production, titanium dioxide ( $\text{TiO}_2$ ) has recently attracted the attention of researchers from all over the world. It has been used primarily in DSSC due to its nanocrystalline mesoporous nature, which translates to a high surface area for dye adsorption [20]. The solar energy may then be used to excite the absorbed dye molecules to create electron-hole pairs that are then divided and transported into the  $\text{TiO}_2$  lattice. The dye's absorption spectrum and its anchoring to the surface of  $\text{TiO}_2$  are crucial factors in determining the cell's effectiveness [21]. The comparison of semiconductor solar cells and DSSCs is given in **Table 1**. Much attention has been paid to the dye since it is crucial for absorbing visible light and converting photon energy into electricity, paid to survey the effective sensitizer dyes [22]. Porphyrins [23], platinum complex [24], and other organic dyes have been created and utilized as sensitizers together with other metal complexes [25]. Ru-based complexes sensitizers are employed often because of their superior effectiveness and long lifespan. These benefits, however, are outweighed by their high price and propensity to degrade in the presence of water [26]. Additionally, it is considered to be extremely poisonous and carcinogenic.

**Table 1.** Comparison between semiconductor based solar cell and the dye sensitized solar cell (DSSC) [16].

	Semiconductor solar cells	Dye-sensitized solar cells
Transparency	Opaque	Transparent
Pro-environment (material & process)	Normal	Great
Power generation cost	High	Low
Power generation efficiency	High	Normal
Color	Limited	Various

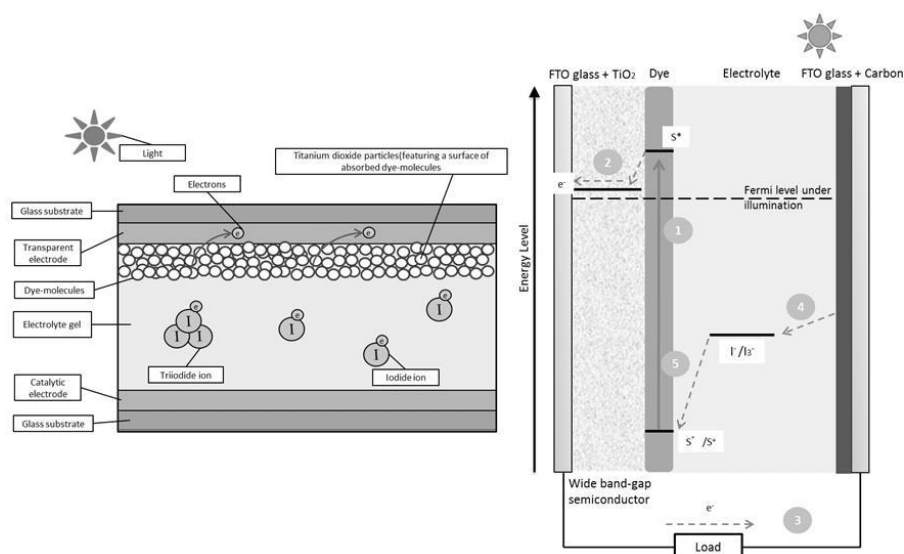

**Figure 2.** (a) the structure of DSSC; (b) the mechanism of DSSC [16].

The dye-sensitized solar cell (DSSC), one of the several solar technologies, holds out the most hope for a low-cost, highly-manufacturable answer to an energy economy free of fossil fuels and their negative effects. The overall conversion efficiency of DSSCs documented in the literature, however, has only grown by 4% in the last 25 years. This chapter gives a general overview of the DSSC architecture, discusses the state of the technology today, and considers the causes that have prevented the cell efficiency from improving despite enormous amounts of effort. In advancing technologies. It emphasizes the extremely difficult and complicated nature of DSSC optimization as well as the necessity of multiscale first principles mathematical modeling of DSSCs to fully comprehend the physics, dynamics, and interactions [27] of internal DSSC components. These models enable *in silico* design and DSSC optimization and can characterize cellular activities at various temporal and geographical dimensions [28].

### 4.3. Coordination material-based nanohybrids in DSSCs

A sensitizer molecule (often several dye molecules) is used in dye-sensitized solar cells (DSSCs), a solar photovoltaic device that transforms solar energy into electrical energy. The cost of manufacturing DSSCs is much cheaper than that of traditional silicon-based solar cells since they do not include pricey silicon. Their commercial usage has been hindered despite the cost benefit by their generally poor chemical stability and low photo conversion efficiency (PCE). The two most costly components of PV technology, the platinum counter electrode (CE) and ruthenium-based dyes, may be replaced with less expensive ones, however some recent advances showing PCE in the region of 15% imply that DSSCs can be a low-cost alternative to PV technology. In the DSSC, the material choice for the CE is critical. performance because its primary function is to draw electrons from the outside circuit and catalyze a redox process to decrease the electrolyte ions. Due to its intriguing catalytic activity and intriguing physicochemical features, transition metal chalcogenides (sulfides/selenides), among others, have lately gained significant study attention as CE material as an alternative to platinum. This chapter begins with an explanation of the

fundamental operation of the DSSC with a focus on the function of the CE. This is followed by a summary of the typical procedures for the synthesis of sulfides and selenides-based CE for DSSC application. We next compare output metrics including PCE, stability, and fill factor to the literature on the state of the art for DSSCs made with sulfides/selenides-based CEs. Finally, we summarize overall conclusion and discuss the scope for future research [29].

#### **4.4. Organic solar cells (OSCS)**

A promising new low-cost thin film photovoltaics technology is the organic solar cell (OSC). With the advancement of low bandgap organic materials synthesis and device processing technologies, the power conversion efficiency (PCE) of OSCs has surpassed 16% for single junction and 17% for organic-organic tandem solar cells. The OSCs' lackluster device stability is the biggest impediment to their commercial application. The elements affecting OSC stability are enumerated here. Oxygen, water, radiation, heating, metastable morphology, diffusion of electrode and buffer layer materials, and mechanical stress are the stability-limiting elements. The most recent developments in methods to strengthen the stability of OSCs are reviewed, including material design, active layer device engineering, using employing stable electrodes and encapsulating materials, inverting the shape, and improving the buffer layers. Also included are the guidelines from the International Summit on Organic Photovoltaic Stability. The different research approaches that may be used to attain the necessary device efficiency and stability are outlined, opening up prospective routes for the successful commercialization of OSCs [30].


The most promising organic solar cells (OSCs) for use in wearable energy resources and photovoltaics incorporated into buildings are those that are flexible and semitransparent. As a result, the development of novel flexible bottom or top transparent electrodes, the design and synthesis of high-performance photoactive layer and low temperature processed electrode buffer layer materials, and the engineering of device architecture have all contributed to the rapid development of flexible and semitransparent OSCs in recent years. The flexible OSCs have the best power conversion efficiency at over 10%, while semitransparent OSCs have the highest at 7.7% with an average visual transmittance of 37%.

##### **4.4.1. Factors limiting the stability of OSCS**

The stability of OSCs in the real world might be limited by a variety of circumstances, which is different from the research setting in labs. In this section, we go over the elements metastable morphology, electrode and buffer layer diffusion, oxygen and water, radiation, heating, and mechanical stress that affect OSC stability over the course of their whole lifetimes (**Figure 3**). The essential element of OSCs is an active layer, which typically consists of two or three phases (donor phase, acceptor phase, and mixed donor/acceptor phase) [31]. Because organic components [32,33] move around so much, phase separation is always metastable. Micro-focused grazing incidence small angle X-ray scattering (mGISAXS) was utilized by Muller-Buschbaum. To examine the metastable morphology of a polymer/fullerene mix. A morphological deterioration model was put out by them **Figure 3a–d** in which the donor domains drift apart from one another (smaller domains disappear, whilst bigger



ones increase) [34].

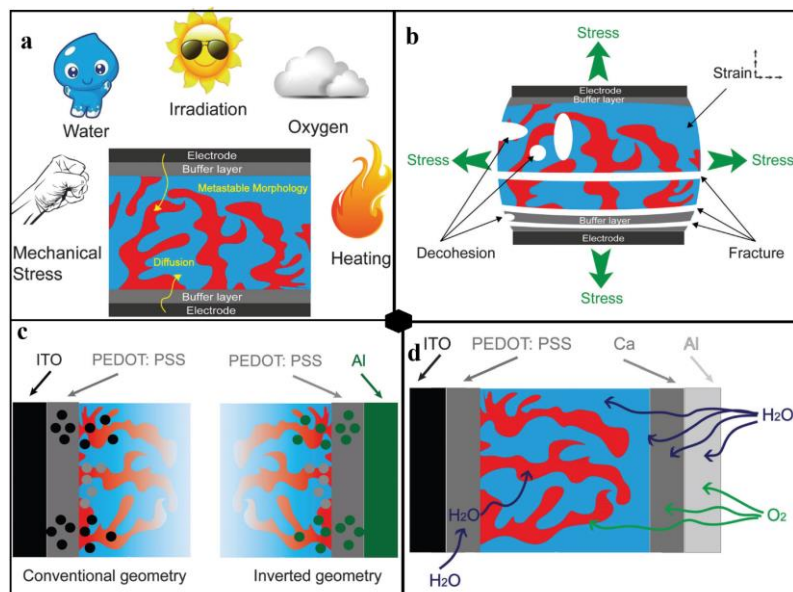

**Figure 3.** Organic solar cells (OSCs); (a) schematic diagram of the factors limiting the stability of OSCs; (b) schematic diagram of the device under mechanical stress; (c) schematic diagram of the diffusion of electrodes and buffer layers; (d) schematic diagram of the diffusion of oxygen and water [35].

The efficiency of bulk heterojunction (BHJ)-based organic solar cells (OSCs) has significantly increased during the past several years. However, more advancements are required for precision device fabrication and large-scale roll-to-roll (R2R) manufacture of this technology. The essentials of a BHJ OSC, including its operating principle and performance traits, are highlighted in this article. Different degradation variables impacting the operational life of OSCs are explored, and the significance of stability for device longevity is supported. Last but not least, methods to increase OSC stability include encapsulating the device, controlling morphology in the BHJ layer, and interfacial engineering using buffered layers. Emphasis is placed on the utilization of inverted geometry and different electrode materials. In addition, a straightforward mathematical model of OSC deterioration trends is suggested. This study covers practically all of the major factors that are thought to be crucial for understanding the current condition of BHJ OSCs regarding stability and deterioration [36,37].

#### 4.5. Coordination material-based nanohybrids in PSCs

Coordination material-based nanohybrids have emerged as promising components in the development of perovskite solar cells (PSCs), offering innovative solutions to enhance their performance and stability. PSCs, with their remarkable light-absorption properties and cost-effective fabrication methods, have gained attention as next-generation photovoltaic devices. Integration of coordination nanohybrids into PSCs involves incorporating tailored nanoscale architectures, often derived from metal-organic frameworks (MOFs) or other coordination materials, to address challenges associated with PSCs. The unique properties of coordination nanohybrids contribute significantly to PSCs. These materials can serve as electron or

hole transport layers, enhancing charge carrier mobility within the solar cell. Their tunable structures and functionalities allow for precise control over interfaces, leading to improved charge separation and reduced recombination losses. Additionally, coordination nanohybrids can function as stabilizing agents, mitigating the notorious issue of perovskite material degradation due to moisture or temperature fluctuations. In the quest for efficient and stable PSCs, the incorporation of coordination material-based nanohybrids has shown promising results. Researchers are exploring various strategies, such as incorporating nanohybrids as interlayers or modifying the perovskite layer itself, to optimize device performance. By leveraging the unique properties of coordination nanohybrids, PSCs can potentially achieve higher efficiencies, enhanced long-term stability, and reduced manufacturing costs, paving the way for the widespread adoption of this renewable energy technology. As advancements in materials science and nanotechnology continue, coordination material-based nanohybrids stand at the forefront of innovations in PSCs, bringing us closer to a sustainable and efficient future for solar energy.

High performance perovskite solar cells (PSCs) require a substantial amount of hole transporting material (HTM). HTMs based on inorganic, organic, and hybrid (organic-inorganic) materials have been effectively produced and studied throughout the years. With the use of 2,2',7,7'-tetrakis(N,N-di-p-methoxyphenylamine) 9,9-spirobifluorene (spiro-OMeTAD) as HTM, perovskite solar cells today achieved an efficiency of 22.1%. Alternative materials are needed since the synthesis and price of organic HTMs provide a significant challenge. Inorganic HTMs have significantly improved in stability and power conversion efficiency (PCE) during the last few years. CuOx just attained the PCE of 19.0% with more consistency. These discoveries demonstrate that for next-generation PSCs, inorganic HTMs are superior to organic HTMs. In this paper, we primarily concentrated on the most recent developments in inorganic and hybrid HTMs for PSCs and emphasized how the stability and efficiency of PSCs were increased by switching from metal oxides to HTMs. Therefore, we anticipate that the energy levels of these inorganic HTMs will fit the valence band of perovskites extremely well, and increased efficiency aids in the practical deployment of low cost PSCs in the future [38].

#### **4.6. Silicon solar cells**

Historical advancements that led to the creation of high-efficiency crystalline silicon solar cells are recognized and explained. Despite the development of laboratory cells that perform close to their theoretical maximum, commercial cell designs still need to undergo substantial development in order to reach their full potential. To achieve commercial devices of 20% efficiency from solar-grade substrates, in particular, the development of cell structures and processes that enable fully activated device volumes in conjunction with well-passivated metal contacts and front and rear surfaces is crucial (yet not particularly difficult). Manufacturers will be forced to adapt their designs in this way by the inevitable trend toward smaller substrates if they don't want to suffer significant performance losses. Thin-film crystalline silicon cells, which are a kind of thin-film technology, are anticipated to take over at some point, a credible candidate. It is especially important to achieve devices with fully activated volumes


(diffusion lengths much greater than device thicknesses), well-passivated metal contacts and surfaces, and the crucial inclusion of light trapping because current commercial techniques and processes are generally unsuitable for thin-film fabrication. A key characteristic of this laboratory cell is its extremely good light trapping, which disproves the long-standing criticism of crystalline silicon regarding its poor absorption properties and correspondingly perceived inability to achieve high-performance thin-film devices. The recent achievement of 21.5% efficiency on a thin crystalline silicon cell (less than 50  $\mu\text{m}$  thick) adds credibility to the pursuit of crystalline silicon in thin films. The parallel-multijunction cell is a low-cost, low-quality polycrystalline silicon material. Over the next 10 years, structure may offer a method for attaining fully active cell volumes with the ability to reach acceptable efficiencies at cheap cost.

### **First silicon cells, 1940–1950**

Russell Ohl of Bell Laboratories discovered a clearly defined barrier while researching recrystallized melts of commercially high-purity silicon. Fortunately, impurity segregation during the recrystallization process led to the formation of these natural connections. He referred to one side of the junction as “positive” or “*p*-type” and the other as “*n*-type” (the functions of acceptors and donors were not understood at the time). The computation of cell voltage polarity has been made easier for future generations thanks to this lucky naming decision! Because of the absence of control over the junction position and the caliber of the crystalline silicon material, Russel Ohl was unable to create functional cells from these natural connections, as illustrated in **Figure 2**, with efficiencies significantly below 17 [39].

By better utilizing the solar spectrum, it is possible to increase the cell efficiency of silicon solar cells in three different ways: photoluminescence (shifting photons into wavelength ranges better accepted by the solar cell), down-conversion (cutting one high energy photon into two low energy photons), and up-conversion (combining low energy photons to one high energy photon). This study discusses the appropriateness of current materials for use with silicon solar cells and presents the state-of-the-art of these three approaches [14].

The crystalline silicon (c-Si) solar cell has been recognized as the only affordable, long-term, sustainable, and environmentally acceptable renewable energy source to displace fossil fuels since its invention. Si-based photovoltaic (PV) technology has advanced at a pace that is sufficient for the job. It has increased to 55 GW, controls 90% of the market, and has an admirable track record of price reductions (**Figure 4**). By 2020, it is predicted that the market would expand by 20 to 30 percent and produce 100 Gigawatts (WP) annually [1]. Cost reduction to compete with fossil fuels has been the main driver of Si PV's industrial growth. Solar cell production costs have decreased from \$76/WP in 1977 to \$0.3/WP in 2015. This cost is still 3–4 times higher than carbon-based fuels [40].

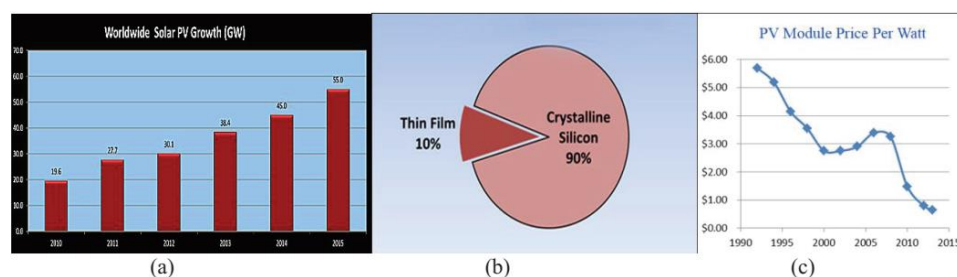

**Figure 4.** (a) PV growth from 2010–2015; (b) crystalline Si PV market share; (c) reduction in PV module price [40].

#### 4.7. Tandem solar cells

Tandem solar cells represent a cutting-edge advancement in solar photovoltaic technology, aiming to maximize energy conversion efficiency by stacking multiple layers of solar cell materials with complementary absorption spectra. Unlike traditional single-junction solar cells that are limited by the Shockley-Queisser efficiency limit, tandem solar cells leverage the concept of spectral utilization to capture a broader range of solar radiation. In a tandem configuration, each layer is designed to absorb a specific portion of the solar spectrum, ensuring that a larger fraction of sunlight is converted into electricity. This tandem architecture typically combines materials with varying bandgaps, allowing them to absorb light at different wavelengths. Common tandem cell designs include the integration of silicon-based cells with thin-film technologies like perovskite or organic photovoltaics. One of the primary advantages of tandem solar cells is their potential to achieve efficiencies beyond what is possible with standalone solar cells. By efficiently utilizing a broader range of the solar spectrum, tandem cells have demonstrated the ability to surpass the limitations imposed by individual materials. Moreover, tandem configurations can be tailored for specific applications, such as space exploration or terrestrial power generation, by optimizing the choice of materials and bandgap combinations. While tandem solar cells hold great promise for significantly improving energy conversion efficiencies, challenges remain, including the development of stable and scalable manufacturing processes, managing the complexities of integrating different materials, and addressing cost considerations. Nevertheless, ongoing research and development efforts continue to propel tandem solar cells toward commercial viability, offering a path toward more efficient and sustainable solar energy utilization in the future [41].

#### 4.8. Quantum dot solar cells

Quantum dot (QD) solar cells have the capacity to use hot photogenerated carriers to produce larger photovoltages or higher photocurrents, which has the potential to raise the maximum thermodynamic conversion efficiency of solar photon conversion up to roughly 66%. In order to gather hot carriers in QD array photoelectrodes before they relax to the band margins by phonon emission, the first effect relies on miniband transport. The latter effect relies on using hot carriers in QD solar cells to improve impact ionization processes and produce and collect more electron-hole pairs. The three QD solar cell configurations—photoelectrodes with QD arrays, QD-sensitized

nanocrystalline  $\text{TiO}_2$ , and QDs distributed in a mixture of hole- and electron-conducting polymers—are all explained. These high-efficiency setups call and we report preliminary findings on slower hot electron cooling in InP QDs [42] for slow hot carrier cooling durations. Quantum dot (QD) solar cells have the capacity to use hot photogenerated carriers to produce larger photovoltages or higher photocurrents, which has the potential to raise the maximum thermodynamic conversion efficiency of solar photon conversion up to roughly 66%. In order to gather hot carriers in QD array photoelectrodes before they relax to the band margins by phonon emission, the first effect relies on miniband transport. The latter effect relies on using hot carriers in QD solar cells to improve impact ionization processes and produce and collect more electron-hole pairs. The following three QD solar cell arrangements are described: (1) photoelectrodes with QD arrays, (2) nanocrystalline  $\text{TiO}_2$  that has been QD-sensitized, and (3) QDs that are disseminated in a mixture of hole- and electron-conducting polymers [43]. We report preliminary findings on slower hot electron cooling in InP QDs, which are necessary for these high-efficiency designs [44,45].

#### **4.9. Flexible solar cells**

Flexible solar cells represent a revolutionary development in solar photovoltaic technology, offering a versatile and adaptable approach to harnessing solar energy. Unlike traditional rigid solar panels, flexible solar cells are fabricated on flexible substrates, such as plastics or thin metal foils, allowing them to conform to curved or irregular surfaces. This flexibility opens up a wide range of applications, including integration into wearable devices, roll-able solar blankets, and other unconventional surfaces. The most common materials used in flexible solar cells include thin-film technologies like amorphous silicon, organic photovoltaics (OPV), and emerging materials such as perovskites. These materials provide the flexibility needed for the solar cells to bend and conform without compromising their energy conversion efficiency. One of the key advantages of flexible solar cells lies in their lightweight and portable nature, making them ideal for applications where traditional, rigid solar panels would be impractical. The flexibility also enables seamless integration into various surfaces, expanding the possibilities for solar energy harvesting in unconventional environments. Furthermore, flexible solar cells are particularly well-suited for portable and off-grid power solutions. They can be easily rolled up or folded, making them compact and easy to transport. This makes them valuable for applications such as camping, outdoor activities, and emergency power supply. Despite the promising advantages, challenges remain in terms of achieving high efficiency and maintaining durability over extended periods, especially in outdoor conditions. Researchers are actively working on improving the stability and efficiency of flexible solar cells through advancements in materials and manufacturing processes. It has been stated that the electron is the supreme form of money in contemporary culture. Electricity is the most often utilized source of energy since it is silent, clean, portable, and quickly transformed into labor. However, except from a 16% contribution from nuclear fission, we mostly generate power by burning hydrocarbons and, ironically, far less expensive coal. For instance, coal accounted for over half (49%) of the 4.1 trillion kWh of power produced in the US in 2006. China alone will need to add around

25 GW of new capacity annually over the next ten years to keep up with demand, which is the equivalent of building one sizable coal power plant every week. Unfortunately, coal releases a lot of CO<sub>2</sub> that alters the climate, and it also includes mercury, ocean and food chain contamination is being brought on by combustion. The largest challenge of our time is to generate power only from solar energy in order to reduce emissions and avert climate change [46]. Flexible thin-film solar cells are compact and strong mechanically. Flexible solar panels are anticipated to provide specialty items that call for lightweight, mechanical flexibility, and moldability into complicated designs, such as roof-panels for electric cars, foldable umbrellas, camping tents, etc., with fast expanding battery technology. In this article, we offer a thorough analysis of pertinent materials that may be used to create flexible solar cells. Metals, ceramics, glasses, and polymers have all been examined as substrate materials. In terms of active materials, we mainly concentrate on recently developed novel semiconductors such organometal halide perovskites, conjugated donor/acceptor polymers, and tiny organic donor/acceptor molecules. the electrode Materials, thin metal films/nanowires, conducting polymers, nanocarbons, carbon nanotubes [47,48] and transparent conducting oxides are discussed in literature, along with advantages, disadvantages, and potential of these materials for creating flexible photovoltaics of the future [49].

## **5. Conclusion**

This review provides comprehensive exploration of the diverse and dynamic landscape of nanohybrid materials, encompassing coordination material-based nanohybrids, luminescent nanohybrids, conductive polymer nanostructures [43], and the revolutionary realm of flexible solar cells. The synthesis methods, properties, and applications of these nanohybrids have been elucidated, highlighting their significant contributions to catalysis, sensing, drug delivery, and energy storage. The integration of coordination nanohybrids in perovskite solar cells (PSCs) emerged as a promising avenue, showcasing their potential to enhance device performance and stability. Furthermore, the synthesis of luminescent nanohybrids for bioimaging purposes and the development of layered 2D material-based nanostructured hybrids for advanced energy storage and conversion underscore the breadth of applications for these innovative materials. The exploration of conductive polymer nanostructures in drug delivery systems revealed their potential for controlled release and targeted therapeutics. The final segment of the review explores transformative field of flexible solar cells, emphasizing their adaptability and lightweight design. The potential applications of flexible solar cells in portable and off-grid power solutions open new frontiers in solar energy harvesting. While these nanohybrid materials exhibit remarkable properties and hold promise across various domains, challenges such as stability, scalability, and environmental impact remain areas of ongoing research. Nevertheless, the collective advancements showcased in this review underscore the potential of nanohybrid materials to revolutionize materials science, nanotechnology, and renewable energy. As researchers continue to innovate and address existing challenges, these nanohybrids stand poised to contribute significantly to the advancement of technology and the realization of sustainable and efficient solutions

for numerous applications.

**Conflict of interest:** The authors declare no conflict of interest.

## References

1. Zhao J, Wang S, Lu S, et al. A luminescent europium-dipicolinic acid nanohybrid for the rapid and selective sensing of pyrophosphate and alkaline phosphatase activity. *Nanoscale*. 2018; 10(15): 7163-7170. doi: 10.1039/c8nr00223a
2. Munawar A, Tahir MA, Shaheen A, et al. Investigating nanohybrid material based on 3D CNTs@Cu nanoparticle composite and imprinted polymer for highly selective detection of chloramphenicol. *Journal of Hazardous Materials*. 2018; 342: 96-106. doi: 10.1016/j.jhazmat.2017.08.014
3. Maphutha S, Moothi K, Meyyappan M, et al. A carbon nanotube-infused polysulfone membrane with polyvinyl alcohol layer for treating oil-containing waste water. *Scientific Reports*. 2013; 3(1). doi: 10.1038/srep01509
4. Mutti AM, Canisares FS, Santos JA, et al. Silica-based nanohybrids containing europium complexes covalently grafted: structural, luminescent, and cell labeling investigation. *Journal of Sol-Gel Science and Technology*. 2023; 1-17.
5. Liu X, Zheng W, Kumar R, et al. Conducting polymer-based nanostructures for gas sensors. *Coordination Chemistry Reviews*. 2022; 462: 214517. doi: 10.1016/j.ccr.2022.214517
6. Chaudhuri H, Yun YS. Synthesis and environmental applications of graphene oxide/layered double hydroxides and graphene oxide/MXenes: A critical review. *Separation and Purification Technology*. 2022; 297: 121518. doi: 10.1016/j.seppur.2022.121518
7. Khan S, Iqbal A. Organic polymers revolution: Applications and formation strategies, and future perspectives. *Journal of Polymer Science and Engineering*. 2023; 6(1): 3125. doi: 10.24294/jpse.v6i1.3125
8. Lonkar SP, Pillai VV, Patole SP, et al. Scalable in Situ Synthesis of 2D–2D-Type Graphene-Wrapped SnS<sub>2</sub> Nanohybrids for Enhanced Supercapacitor and Electrocatalytic Applications. *ACS Applied Energy Materials*. 2020; 3(5): 4995-5005. doi: 10.1021/acsaem.0c00519
9. Kojima A, Teshima K, Shirai Y, et al. Organometal Halide Perovskites as Visible-Light Sensitizers for Photovoltaic Cells. *Journal of the American Chemical Society*. 2009; 131(17): 6050-6051. doi: 10.1021/ja809598r
10. De Wolf S, Holovsky J, Moon SJ, et al. Organometallic Halide Perovskites: Sharp Optical Absorption Edge and Its Relation to Photovoltaic Performance. *The Journal of Physical Chemistry Letters*. 2014; 5(6): 1035-1039. doi: 10.1021/jz500279b
11. Miyata A, Mitiglu A, Plochocka P, et al. Direct measurement of the exciton binding energy and effective masses for charge carriers in organic–inorganic tri-halide perovskites. *Nature Physics*. 2015; 11(7): 582-587. doi: 10.1038/nphys3357
12. Malinkiewicz O, Yella A, Lee YH, et al. Perovskite solar cells employing organic charge-transport layers. *Nature Photonics*. 2013; 8(2): 128-132. doi: 10.1038/nphoton.2013.341
13. Ullah A, Shah Bukhari K, Khan S, et al. Diversification Via Coupling Reactions and Biological Activities of Pyrimidine Derivatives. *ChemistrySelect*. 2023; 8(47). doi: 10.1002/slct.202303072
14. Xu B, Bi D, Hua Y, et al. A low-cost spiro[fluorene-9,9'-xanthene]-based hole transport material for highly efficient solid-state dye-sensitized solar cells and perovskite solar cells. *Energy & Environmental Science*. 2016; 9(3): 873-877. doi: 10.1039/c6ee00056h
15. Gong J, Sumathy K, Qiao Q, et al. Review on dye-sensitized solar cells (DSSCs): Advanced techniques and research trends. *Renewable and Sustainable Energy Reviews*. 2017; 68: 234-246. doi: 10.1016/j.rser.2016.09.097
16. Zulkifili ANB, Kento T, Daiki M, et al. The Basic Research on the Dye-Sensitized Solar Cells (DSSC). *Journal of Clean Energy Technologies*. 2015; 3(5): 382-387. doi: 10.7763/jocet.2015.v3.228
17. Rahman FU, Khan S, Rahman MU, et al. Effect of ionic strength on DNA–dye interactions of Victoria blue B and methylene green using UV–visible spectroscopy. *Zeitschrift für Physikalische Chemie*. 2023; 238(1): 173-186. doi: 10.1515/zpch-2023-0365
18. Nazir S, Zhang JM, Junaid M, et al. Metal-based nanoparticles: basics, types, fabrications and their electronic applications. *Zeitschrift für Physikalische Chemie*. 2024; 0(0). doi: 10.1515/zpch-2023-0375
19. Sokolský M, Círák J. Dye-sensitized solar cells: materials and processes. *Acta Electrotechnica et Informatica*. 2010; 10(3): 78-81.
20. Khan S, Ajmal S, Hussain T, Rahman MU. Clay-based materials for enhanced water treatment: adsorption mechanisms,

- challenges, and future directions. *Journal of Umm Al-Qura University for Applied Sciences*. 2023; 1-16.
21. Hao S, Wu J, Huang Y, et al. Natural dyes as photosensitizers for dye-sensitized solar cell. *Solar Energy*. 2006; 80(2): 209-214. doi: 10.1016/j.solener.2005.05.009
  22. Kim TY, Park KH, Lee JW, et al. Hierarchical nanorod/nanoflower TiO<sub>2</sub> photoanode for natural dye-sensitized solar cells. *International Journal of Electrochemical Science*. (2015); 10(11): 9466-947.
  23. Odobel F, Blart E, Lagr  e M, et al. Porphyrin dyes for TiO<sub>2</sub> sensitization. *Journal of Materials Chemistry*. 2003; 13(3): 502-510. doi: 10.1039/b210674d
  24. Islam A, Sugihara H, Hara K, et al. Dye Sensitization of Nanocrystalline Titanium Dioxide with Square Planar Platinum(II) Diimine Dithiolate Complexes. *Inorganic Chemistry*. 2001; 40(21): 5371-5380. doi: 10.1021/ic010391y
  25. Gul Z, Salman M, Khan S, et al. Single Organic Ligands Act as a Bifunctional Sensor for Subsequent Detection of Metal and Cyanide Ions, a Statistical Approach toward Coordination and Sensitivity. *Critical Reviews in Analytical Chemistry*. Published online March 13, 2023: 1-17. doi: 10.1080/10408347.2023.2186165
  26. Zhang D, Lanier SM, Downing JA, et al. Betalain pigments for dye-sensitized solar cells. *Journal of Photochemistry and Photobiology A: Chemistry*. 2008; 195(1): 72-80. doi: 10.1016/j.jphotochem.2007.07.038
  27. Khan S, Zahoor M, Rahman MU, et al. Cocrystals; basic concepts, properties and formation strategies. *Zeitschrift f  r Physikalische Chemie*. 2023; 237(3): 273-332. doi: 10.1515/zpch-2022-0175
  28. Lau KKS, Soroush M. Overview of Dye-Sensitized Solar Cells. *Dye-Sensitized Solar Cells*. Published online 2019: 1-49. doi: 10.1016/b978-0-12-814541-8.00001-x
  29. Sarkar A, Chatterjee P, Chakraborty AK. Sulfide and Selenide Based Materials for Emerging Applications. *Sustainable Energy Harvesting and Storage Technology*. Elsevier; 2022.
  30. Duan L, Uddin A. Progress in Stability of Organic Solar Cells. *Advanced Science*. 2020; 7(11). doi: 10.1002/advs.201903259
  31. Khan, S. Phase engineering and impact of external stimuli for phase tuning in 2D materials. *Advanced Energy Conversion Materials*. 2023; 5(1): 40-55.
  32. Khan S, Rahman M, Marwani HM, et al. Bicomponent polymorphs of salicylic acid, their antibacterial potentials, intermolecular interactions, DFT and docking studies. *Zeitschrift f  r Physikalische Chemie*. 2023; 238(01): 1-16.
  33. Ullah I, Khan S. Calligraphy and painting scraps of old and new Asian papers, their simulation, performance, sources, and characteristics. *Journal of Polymer Science and Engineering*. 2024; 6(1): 3260. doi: 10.24294/jpse.v6i1.3260
  34. Li Y, Xu G, Cui C, et al. Flexible and Semitransparent Organic Solar Cells. *Advanced Energy Materials*. 2017; 8(7). doi: 10.1002/aenm.201701791
  35. Cheng P, Zhan X. Stability of organic solar cells: challenges and strategies. *Chemical Society Reviews*. 2016; 45(9): 2544-2582. doi: 10.1039/c5cs00593k
  36. Rafique S, Abdullah SM, Sulaiman K, et al. Fundamentals of bulk heterojunction organic solar cells: An overview of stability/degradation issues and strategies for improvement. *Renewable and Sustainable Energy Reviews*. 2018; 84: 43-53. doi: 10.1016/j.rser.2017.12.008
  37. Djuri  i   AB, Liu FZ, Tam HW, et al. Perovskite solar cells - An overview of critical issues. *Progress in Quantum Electronics*. 2017; 53: 1-37. doi: 10.1016/j.pquantelec.2017.05.002
  38. Rajeswari R, Mrinalini M, Prasanthkumar S, et al. Emerging of Inorganic Hole Transporting Materials For Perovskite Solar Cells. *The Chemical Record*. 2017; 17(7): 681-699. doi: 10.1002/tcr.201600117
  39. Wenham SR, Green MA. Silicon solar cells. *Progress in Photovoltaics: Research and Applications*. 1996; 4(1): 3-33.
  40. Sopian K, Cheow S, Zaidi, S. An overview of crystalline silicon solar cell technology: Past, present, and future. *AIP Conference Proceedings*, 2017.
  41. Green MA, Dunlop ED, Hohl-Ebinger J, et al. Solar cell efficiency tables (version 56). *Progress in Photovoltaics: Research and Applications*. 2020; 28(7): 629-638. doi: 10.1002/pip.3303
  42. Khan S, Ullah I, Khan H, et al. Green synthesis of AgNPs from leaves extract of *Salvia Sclarea*, their characterization, antibacterial activity, and catalytic reduction ability. *Zeitschrift f  r Physikalische Chemie*. 2024; 0(0). doi: 10.1515/zpch-2023-0363
  43. Khan S, Ullah I, Rahman MU, et al. Inorganic-polymer composite electrolytes: basics, fabrications, challenges and future perspectives. *Reviews in Inorganic Chemistry*. 2024; 0(0). doi: 10.1515/revic-2023-0030
  44. Nozik AJ. Quantum dot solar cells. *Physica E: Low-dimensional Systems and Nanostructures*. 2002; 14(1-2): 115-120.



45. Najmi L, Hu Z. Effects of Topological Parameters on Thermal Properties of Carbon Nanotubes via Molecular Dynamics Simulation. *Journal of Composites Science*. 2024; 8(1): 37. doi: 10.3390/jcs8010037
46. Pagliaro M, Ciriminna R, Palmisano G. Flexible Solar Cells. *ChemSusChem*. 2008; 1(11): 880-891. doi: 10.1002/cssc.200800127
47. Najmi L, Zebarjad SM, Janghorban K. Effects of Carbon Nanotubes on the Compressive and Flexural Strength and Microscopic Structure of Epoxy Honeycomb Sandwich Panels. *Polymer Science, Series B*. 2023; 1-10.
48. Najmi L, Hu Z. Review on Molecular Dynamics Simulations of Effects of Carbon Nanotubes (CNTs) on Electrical and Thermal Conductivities of CNT-Modified Polymeric Composites. *Journal of Composites Science*. 2023; 7(4): 165. doi: 10.3390/jcs7040165
49. Li X, Li P, Wu Z, et al. Review and perspective of materials for flexible solar cells. *Materials Reports: Energy*. 2021; 1(1): 100001. doi: 10.1016/j.matre.2020.09.001